



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMAT10.3000NmFBH100T

Fixed Attenuator Type N

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance (ohms)	VSWR (max)	Power
DC-3000MHz	10+/-1.0	50	$\leq 1.25:1$	100W CW

Notes:

- Connector: N male/female
- Operation temperature: -40C to +80C deg
- Materials:
Housing: Aluminum/black anodized
Connector Body: Brass/ternary plate
Connector Contact: Brass/gold

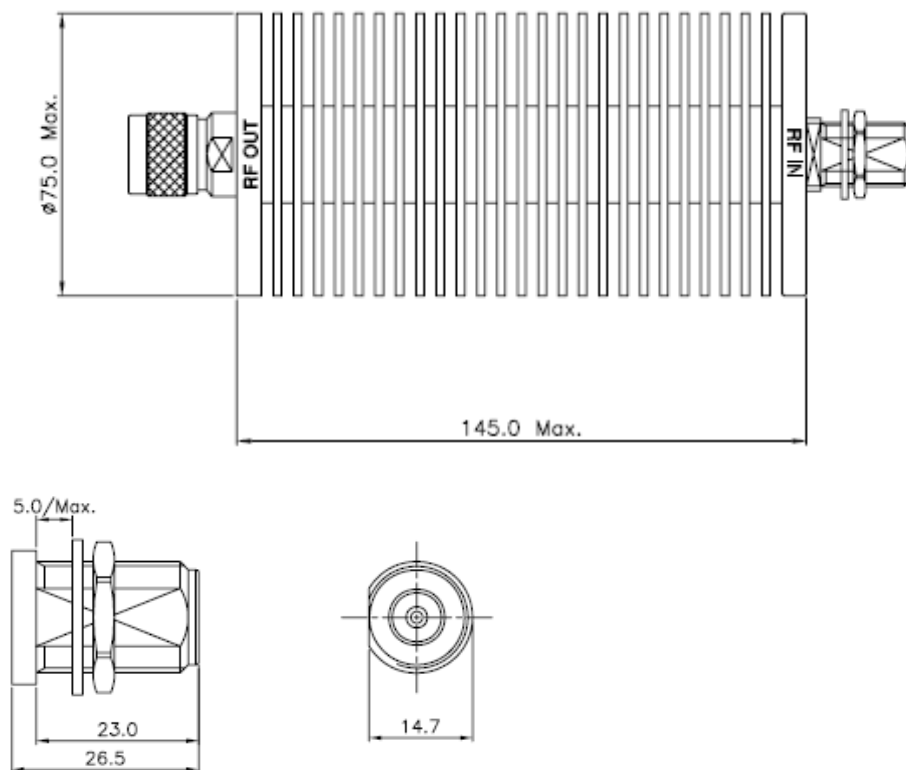

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com