



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator




Model RMA_{Txx.3000N}mf25

Fixed, Type N

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance (Ω)	VSWR (max)	Power
DC-3000MHz	10 to 30+/-1.0	50	$\leq 1.20:1$	25W CW

Notes:

- Insert attenuation value at "xx"
- Connector: N male/female
- Operation temperature: -40°C to +85°C
- Materials:
Housing: Aluminum/clear iridite
Connector Body: Brass/nickel (ternary alloy available)
Connector Contact: Brass/gold
Dielectric: PTFE

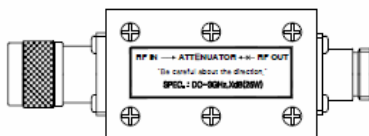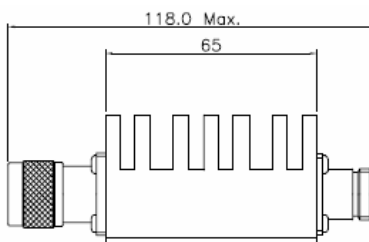

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com