



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator

FIXED



Model RMATxx.3000Nmf50

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Accuracy (dB max)	VSWR (typ)	Power (avg watts)
DC-3	xx	+/-1.5	1.25:1	50

Notes:

- xx = attenuation value (to 60dB)
- Connector: Input N male Output: N female
- Impedance: 50ohms
- Operation temperature: -55C to +85C deg
- Case material: brass/nickel and aluminum/anodize
- Connector materials: shell = brass/nickel or ternary, contacts = BeCu gold or silver

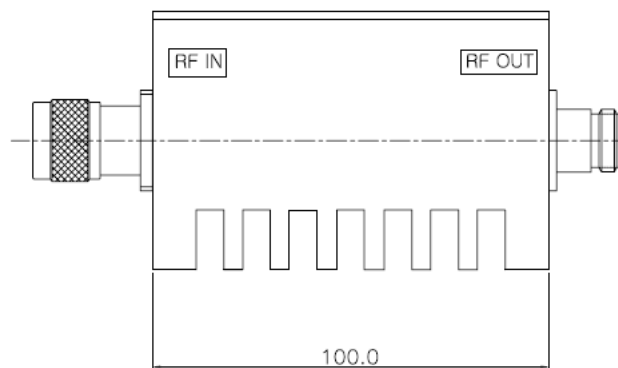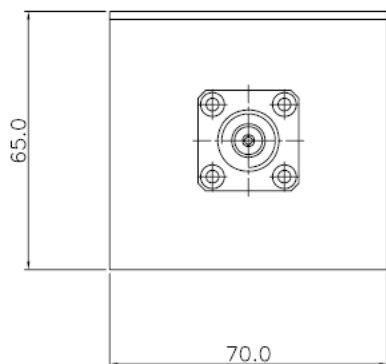

All specifications are subject to change without notice.

Dimensions: millimeters

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com