



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMatxx.3000SMAmf

xxdB, SMA male/female

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Accuracy (dB max)	VSWR (typ)	Power (avg watts)
DC-3	xx	1-9dB +/-0.3 10-40dB +/-1.0	1.20:1	1

Notes:

- xx = attenuation value (to 40dB)
- Connector: Input SMA female Output: SMA male
- Impedance: 50 Ω
- Operation temperature: -55° to +85°C
- Case material: brass/gold

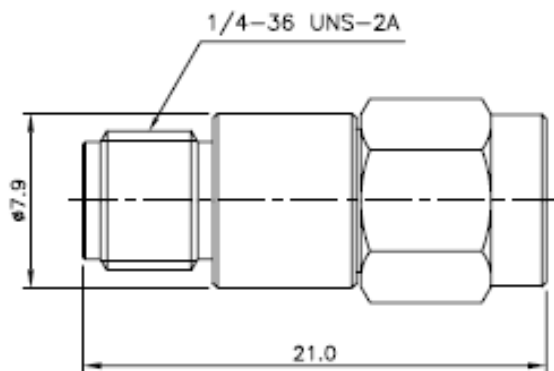

All specifications are subject to change without notice.

Dimensions: millimeters

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com