



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMatxx.6000.Nff100

Fixed Attenuator

Frequency Range (GHz)	Attenuation (dB max)	Accuracy (dB max)	VSWR (typ)	Power (avg watts)
DC-6	10 – 20	+/-0.75	1.35:1	100
	30	+/-1.0		
	40	+/- 1.5		

Notes:

- Connector: Type N female/female (alternate connectors available on request)
- Impedance: 50Ω
- Operation temperature: -54°C to +80°C
- Material :
 - Housing: aluminum/black anodize
 - Connectors: Brass/nickel (ternary alloy available on request)
- Insert attenuation value at “xx” to complete P/N

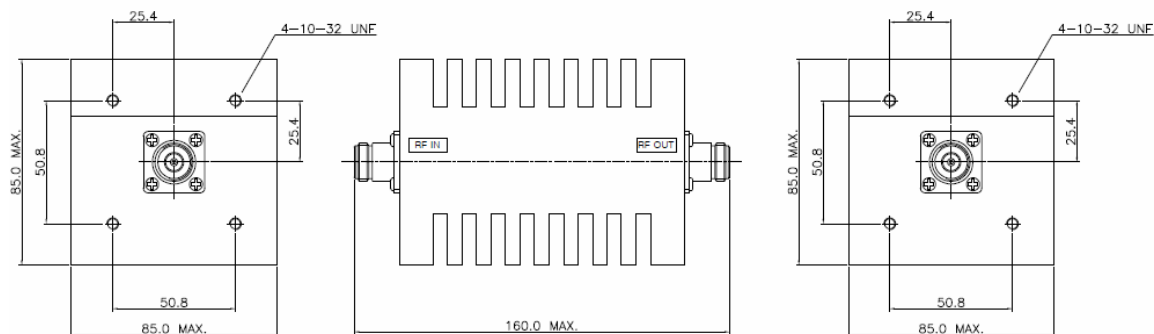

All specifications are subject to change without notice.

Dimensions: millimeters

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 1/10/18