



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMAT10.6000.Nmf10

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (max)	Power (CW)
DC-6	10 +/- 1.0	50Ω	1.35:1	10watts

Notes:

- Connector: N male/female
- Operational temperature: -55°C to +85°C
- Case material/plate: brass/nickel and aluminum/black anodize
- RoHS Compliant Hardware*

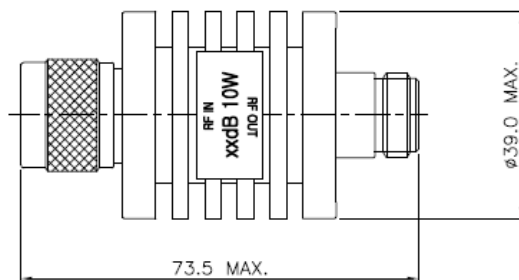

All specifications are subject to change without notice.

Dimensions: millimeters

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 8/16/10