



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator

FIXED


Model RMATxx.18000SMAmf50

SMA 50W series

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (max)	Power (max)
DC-18	1-10 +/-0.8 20 +/- 0.9 30 +/- 1.10 40-50 +/- 1.30	50Ω	1.45:1	50watts

Notes:

- Connector: SMA male/female
- Operation temperature: -55°C to +125°C
- Case material: Black anodize aluminum
- Insert desired attenuation value at "xx" in P/N
- RoHS Compliant Hardware*

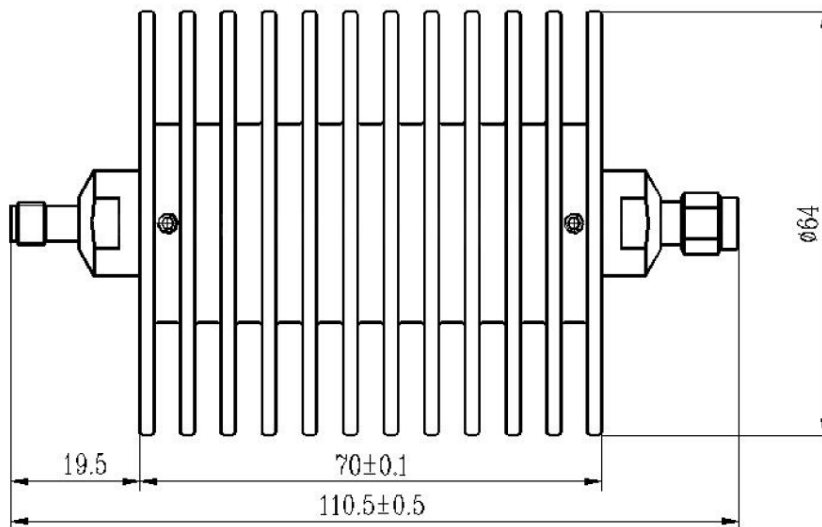

All specifications are subject to change without notice.

Dimensions: mm

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 11/1/13