



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator



Model RMAT20.3000.Nff100

Fixed Attenuator

Frequency Range (GHz)	Attenuation (dB max)	Accuracy (dB max)	VSWR (typ)	Power (avg watts)
DC-3	20	+/-1.0	1.25:1	100

Notes:

- Connector: Type N female/female BH (alternate connectors available on request)
- Impedance: 50Ω
- Operation temperature: -54°C to +80°C
- Material :
Housing: aluminum/black anodize
Connectors: Brass/ternary alloy
- Alternate attenuation values available on request

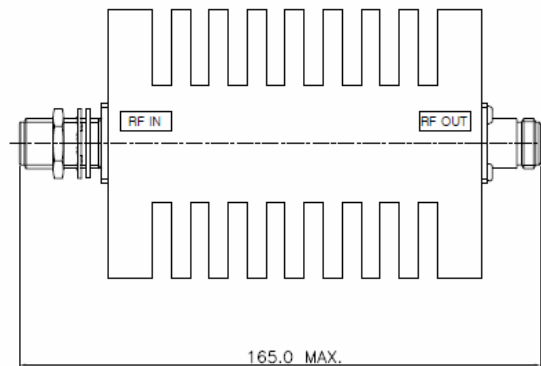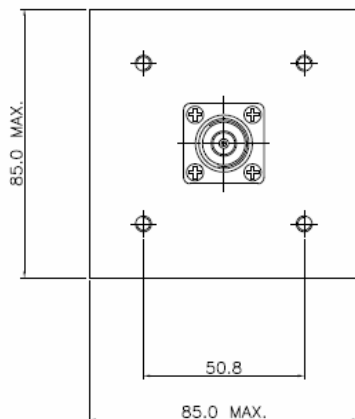

All specifications are subject to change without notice.

Dimensions: millimeters

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com