



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMAT20.3000NmfBH75

Fixed Attenuator Type N – 75W

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance (ohms)	VSWR (max)	Input Power (W CW)
DC-3000MHz	20+/-1.5	50	$\leq 1.30:1$	75

Notes:

- Connector: N male/female
- Operation temperature: -40C to +85C deg
- Materials:
Housing: Aluminum/black anodized
Connector Body: Brass/ternary plate
Connector Contact: Brass/gold

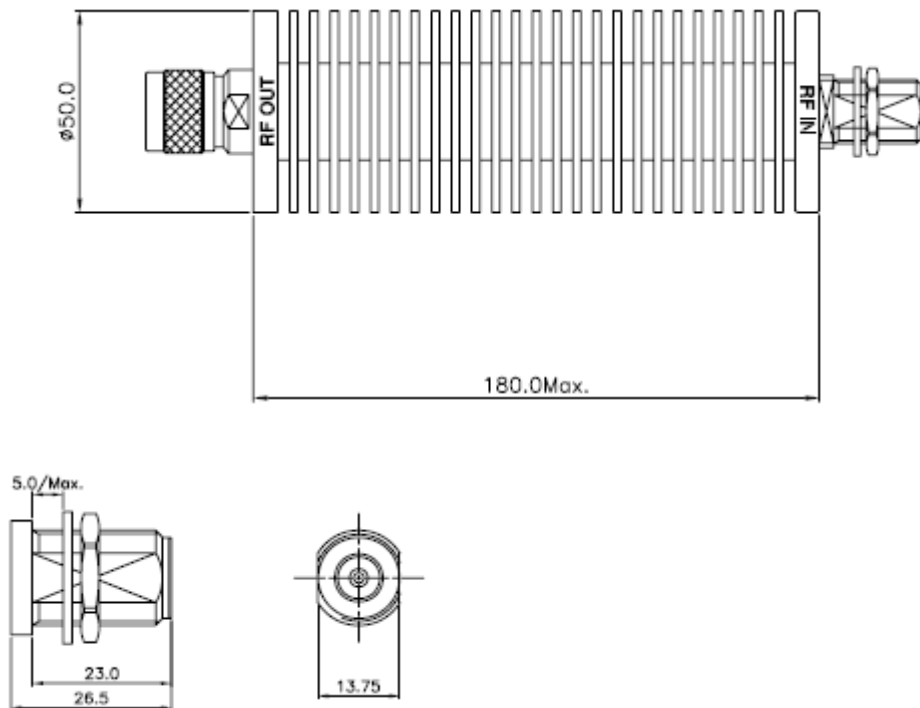

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com