



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

## Coaxial Attenuator



Model RMatxx.3000Nmf200

Fixed Attenuator, Type N

| Frequency Range (GHz)<br>FL-Fu | Attenuation (dB max) | Impedance ( $\Omega$ ) | VSWR (max)   | Power   |
|--------------------------------|----------------------|------------------------|--------------|---------|
| DC-3000MHz                     | xx+/-1.0             | 50                     | $\leq 1.2:1$ | 200W CW |

**Notes:**

- Connector: N male/female
- Insert attenuation value at "xx" in P/N
- Operation temperature: -40°C to +85°C
- Materials:  
Housing: Aluminum/black anodized  
Connector Body: Brass/ternary plate  
Connector Contact: BeCu/gold

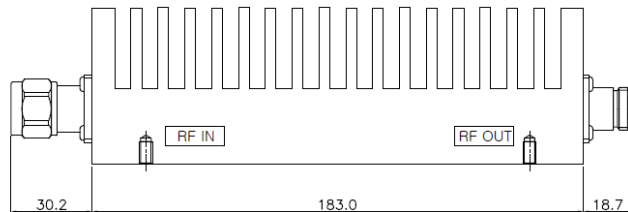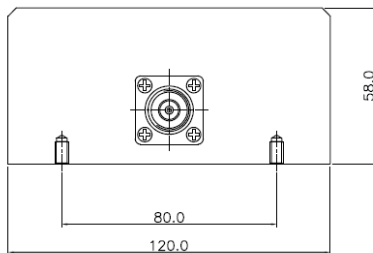

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)