



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMAT20.6000.4310mf200

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Accuracy (dB max)	VSWR (max)	Power (avg watts)
DC-6	20	+/-0.8	1.25:1	200

Notes:

- Connector: 4.3/10 male Input / 4.3/10 female Output
- Unidirectional
- Impedance: 50Ω
- Operation temperature: -55°C to +100°C
- Average power @ 25°C ambient, derated to 20W @ 100°C
- Peak Power: 5kW (5ms pulse width/2% duty cycle)
- Case material: aluminum/black anodize , Connectors: brass/ternary alloy
- Additional attenuation values available

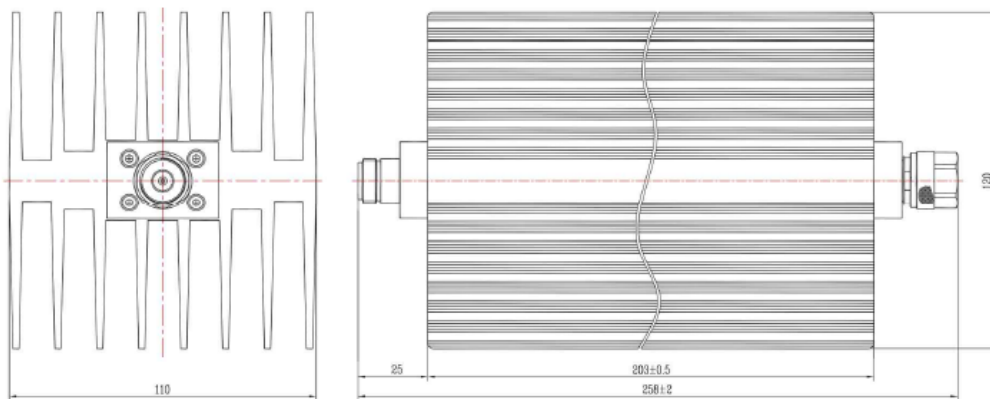

All specifications are subject to change without notice.

Dimensions: millimeters

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com