



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMA_{Txx.6000SMA}m_{f10}

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (max)	Power (max)
DC-6	1 - 9 +/-0.5 10 - 30 +/- 1.0	50Ω	1.2:1	10watts

Notes:


- Weight: 10grams
- Connector: SMA male/female
- Operation temperature: -55°C to +155°C
- Case material/plate: aluminum/chromate
- Insert desired attenuation value at "xx" in P/N
- RoHS Compliant Hardware*

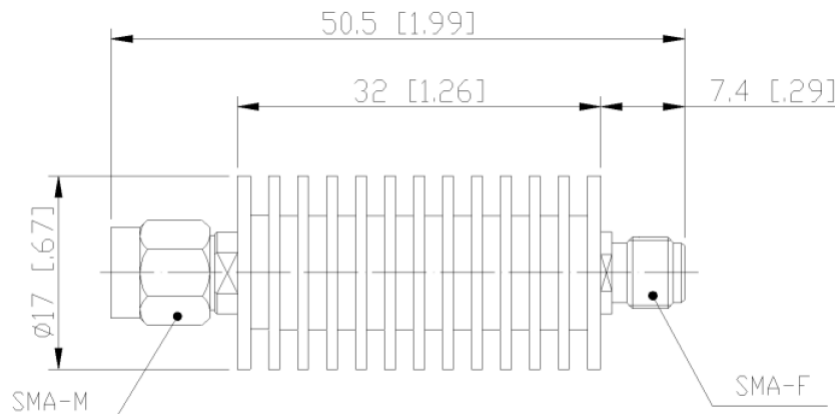

All specifications are subject to change without notice.

Dimensions: millimeters

POWER DERATING

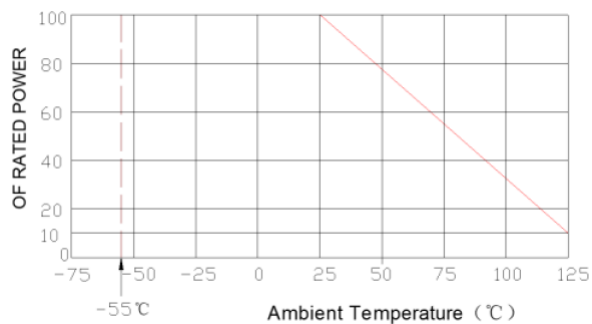

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com