



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

## Coaxial Attenuator

**FIXED**



**Model RMAT30.6000Nmf50**

**Fixed Attenuator**

| Frequency Range (GHz)<br>FL-Fu | Attenuation (dB max) | Accuracy (dB max) | VSWR (typ) | Power (avg watts) |
|--------------------------------|----------------------|-------------------|------------|-------------------|
| DC-6                           | 30                   | +/-1              | 1.30:1     | 50                |

**Notes:**

- Connector: Input N male Output: N female
- Impedance: 50 $\Omega$
- Materials: Connectors=Brass/trimetal, Cooling Fins= aluminum/black anodize

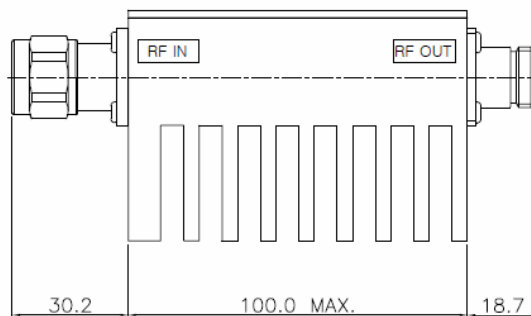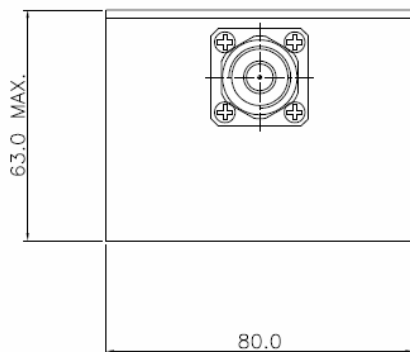

All specifications are subject to change without notice.

Dimensions: millimeters

**Telephone: 978-772-3767**

**Fax: 978-772-3768**

[www.responsemicrowave.com](http://www.responsemicrowave.com)