



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMA_Txx.8000SMA_mf10

Fixed Attenuator

Frequency Range (GHz)	Attenuation (dB max)	Impedance	VSWR (typ)	Power (avg)
DC-8	1 - 10 +/-0.5 11 - 20 +/- 0.6 21- 40 +/-0.8	50Ω	1.25:1	10watts

Notes:

- Weight: 10grams
- Connector: SMA male/female
- Operation temperature: -30°C to +90°C
- Case material/plate: aluminum/chromate
- Insert desired attenuation value at "xx" in P/N
- RoHS Compliant Hardware*

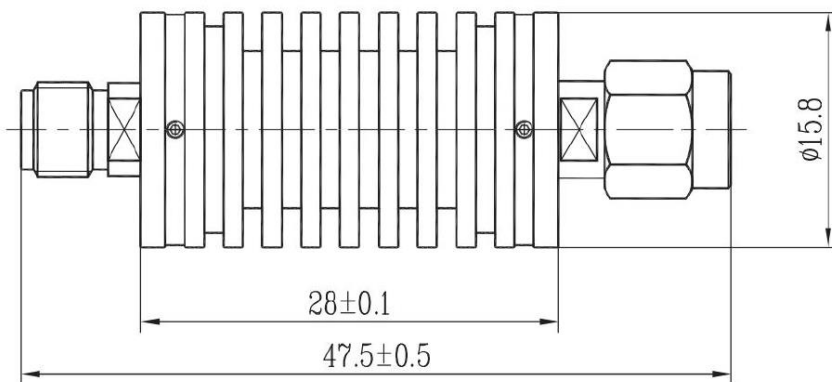

All specifications are subject to change without notice.

Dimensions: millimeters

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 1/15/18