



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMATxx.8500.Nmf50

Fixed Attenuator

Frequency Range (GHz)	Attenuation (dB max)	Impedance	VSWR (max)	Power (max)
DC-8.5	1-10 +/-0.5 11-20 +/- 0.6 21-40 +/- 0.8	50Ω	1.25:1	50 watts

Notes:

- Connector: N male/female
- Operation temperature: -55°C to +125°C
- Material:
 - Connectors: brass/ternary
 - Fins: aluminum/black anodize
 - Center Conductor: BeCu/gold
 - Insulator: PTFE
- Insert desired attenuation value at "xx" in P/N
-

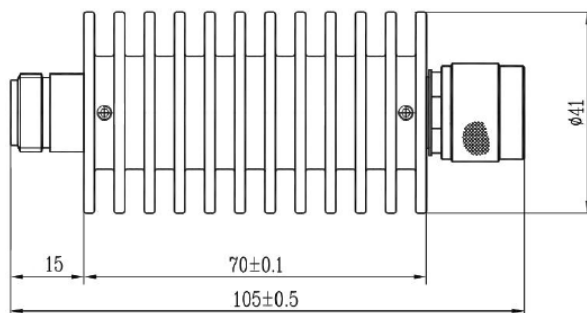

Specifications are subject to change without notice.

Dimensions: mm

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 8/27/05