



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMA_{Txx}.18000SMA_mf

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (typ*)	Power (max)
DC-18	1-6 +/-0.3 7-20 +/- 0.5 21-30 +/- 0.75 40-60 +/-1.5dB	50Ω	1.25:1	2watts

Notes:

- Weight: 5grams
- Connector: SMA male/female
- Operation temperature: -55°C to +125°C
- Case material: Stainless Steel/ passivate
- *VSWR Breakout; DC-4GHz – 1.15:1, 4-12.4GHz – 1.25:1, 12.4-18GHz – 1.35:1
- Insert desired attenuation value at “xx” in P/N
- RoHS Compliant Hardware*

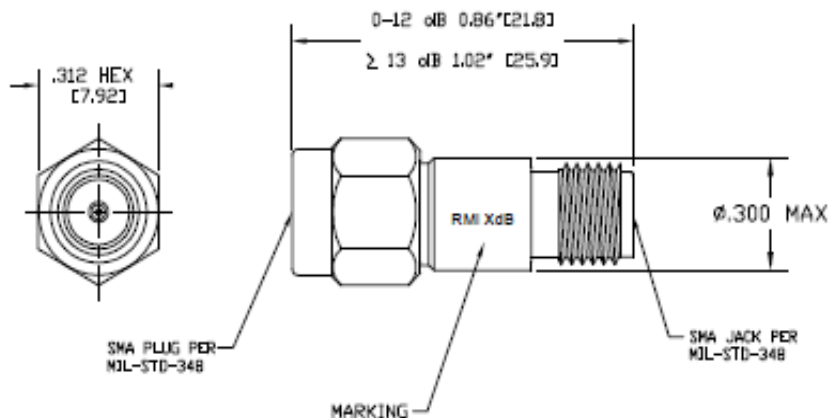

All specifications are subject to change without notice.

Dimensions: inches

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 5/17/21