



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator



Model RMA_Txx.40000.292mf

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (max)	Power (avg)
DC-40	1-6 +/-0.8 7-20 +/- 1.0 21-30 +/- 1.0	50Ω	DC-18 1.3:1 18-40 1.4:1	2watts

Notes:

- Weight: 5grams
- Connector: 2.92mm male/female
- Operation temperature: -55°C to +125°C
- Case material: Stainless Steel/ passivate
- Insert desired attenuation value at "xx" in P/N

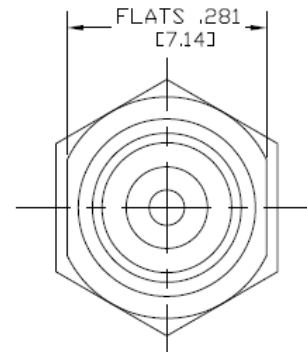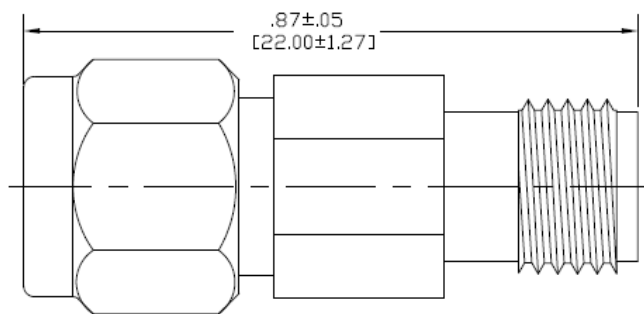

All specifications are subject to change without notice.

Dimensions: inches

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 8/27/05