



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMA_{Txx}.4000SMA_mf50

Fixed Attenuator

Frequency Range (GHz)	Attenuation (dB max)	Accuracy (dB max)	VSWR (typ)	Power (avg watts)
DC-4	1-10	+/-0.4	1.15:1	50
	11-20	+/-0.5		
	21-30	+/-0.6		
	40-50	+/-0.7		

Notes:

- Connector: SMA male/female
- Impedance: 50Ω
- Uni-directional
- Operation temperature: -55°C to +125°C
- Case material aluminum/iridite, Fins: aluminum/black anodize
- Alternate attenuation values available

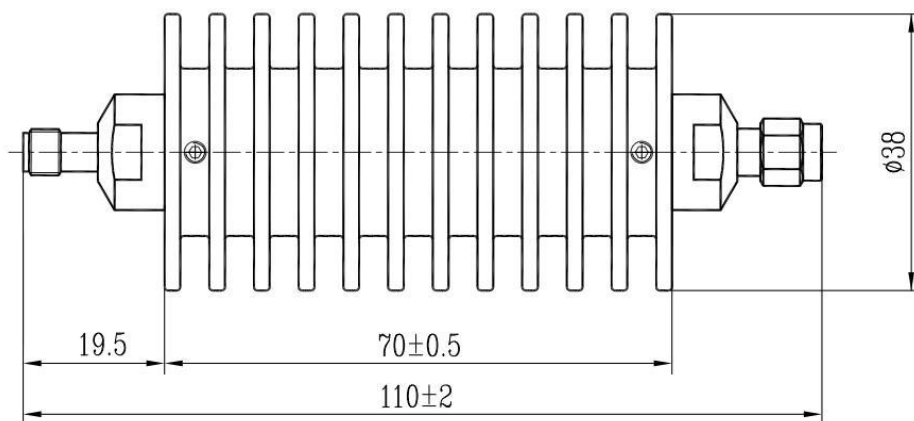

All specifications are subject to change without notice.

Dimensions: inches (millimeters)

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 7/13/09