



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMA_Txx.65000.185mf

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (max)	Power (avg)
DC-65	3, 6 +/- 1.5 10 +/- 1.75 15 & 20 +/- 2.5 30 +/- 5.0	50Ω	1.65:1	1 watt

Notes:

- Weight: 5grams
- Connector: 1.85mm male/female
- Operation temperature: -55°C to +125°C
- Case material: Stainless Steel/ passivate
- Insert desired attenuation value at "xx" in P/N

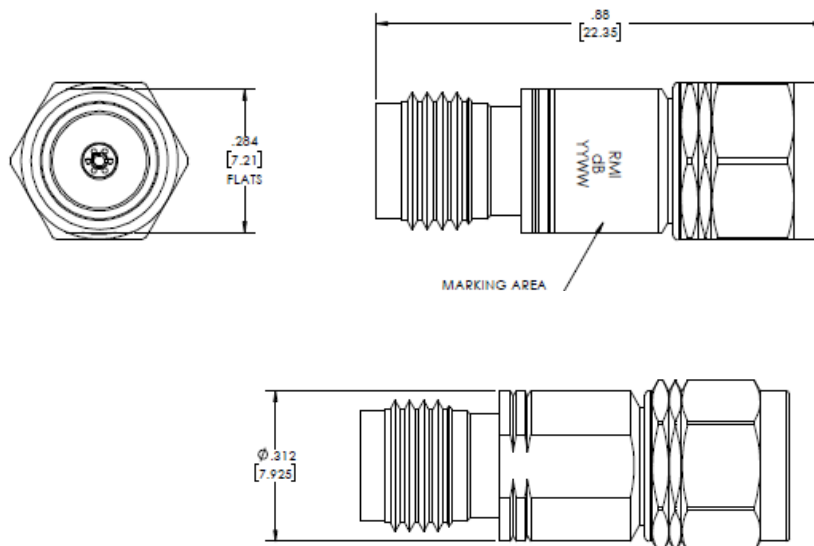

All specifications are subject to change without notice.

Dimensions: inches

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 9/2/15