



9 4 J A C K S O N R O A D, S U I T E 1 1 0, D E V E N S, M A 0 1 4 3 4

Coaxial Attenuator

FIXED


Model RMATxx.18000SMAmf20

SMA 20W series

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (max)	Power (max)
DC-18	1-10 +/-0.6 11-20 +/- 0.8 21-30 +/- 1.0 31-40 +/- 1.2	50Ω	1.45:1	20watts

Notes:

- a. Connector: SMA male/female
- b. Operation temperature: -55°C to +125°C
- c. Case material: Black anodize aluminum
- d. Insert desired attenuation value at "xx" in P/N
- e. *RoHS Compliant Hardware*

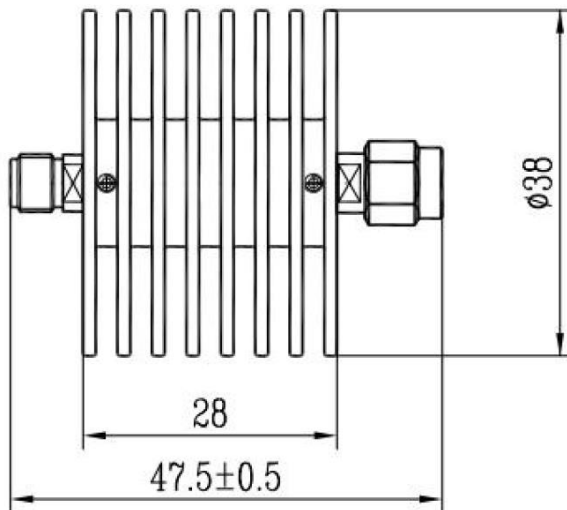

All specifications are subject to change without notice.

Dimensions: mm

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 11/1/13