



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMA_Txx.18000SmfH

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (typ)	Power (max)
DC-18	1-6 +/-0.3 7-20 +/- 0.5 21-30 +/- 0.75	50ohm	1.25:1	2watts

Notes:

- Weight: 5grams
- Connector: SMA male/female
- Operation temperature: -55C to +125C deg
- Case material: Stainless Steel/ passivate
- Insert desired attenuation value at "xx" in P/N
- RoHS Compliant Hardware*

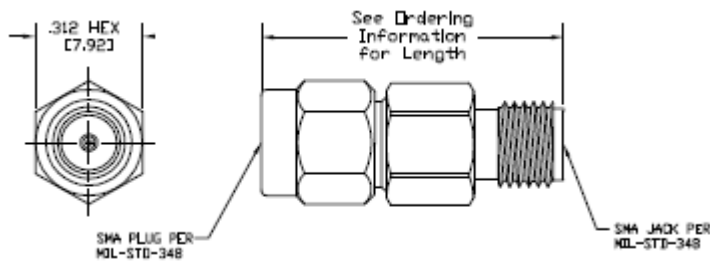

Ordering Information:

Insert desired attenuation value at "xx"

Attenuation Value	Length
1 to 6 dB	0.86 +/- 0.03"
7 to 19 dB	0.86 +/- 0.03"
20 to 30dB	1.02 +/- 0.03"

All specifications are subject to change without notice.

Dimensions: inches

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 8/16/10