



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMA_{Txx.6000}SMa_{mf}

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (typ)	Power (max)
DC-6	1 - 10 +/-0.6 15 - 60 +/- 1.0	50Ω	1.25:1	2watts

Notes:

- Weight: 10grams
- Connector: SMA male/female
- Operation temperature: -55°C to +125°C
- Case material/plate: Brass/gold
- Insert desired attenuation value at "xx" in P/N
- RoHS Compliant Hardware*

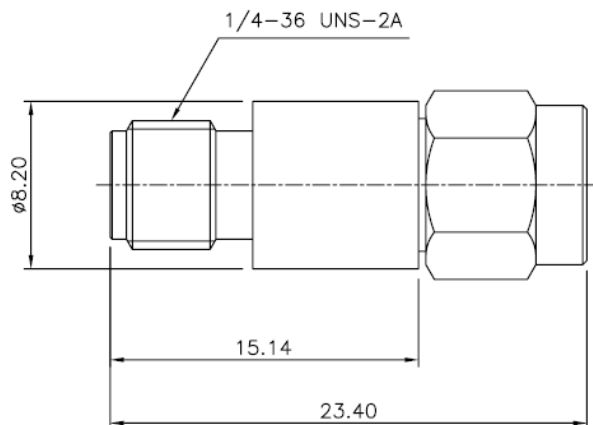

All specifications are subject to change without notice.

Dimensions: millimeters

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 8/16/15