



9 4 J A C K S O N R O A D, S U I T E 1 1 0, D E V E N S, M A 0 1 4 3 4

Coaxial Attenuator


Model RMA_Txx.6000.Nmf

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (max)	Power (CW)
DC-6	3 - 10 +/- 0.4	50Ω	1.20:1	2watts

Notes:

- Connector: N male/female
- Operational temperature: -55°C to +85°C
- Case material/plate: brass/nickel and aluminum/black anodize
- Insert attenuation value at "xx" in P/N
- RoHS Compliant Hardware*

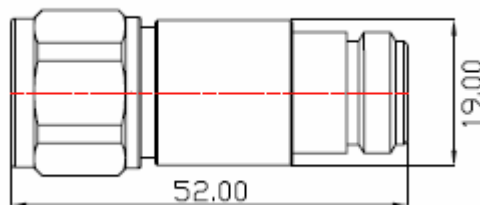

All specifications are subject to change without notice.

Dimensions: millimeters

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 8/16/10