



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMA_{Txx.30000}SMa_{mfa}

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (max)	Power (max)
DC-30	1-30 +/-0.8	50Ω	1.25:1	2watts

Notes:

- Weight: 5grams
- Connector: 3.5mm male/female
- Operation temperature: -55°C to +125°C
- Case material: Stainless Steel/ passivate
- Insert desired attenuation value at "xx" in P/N
- RoHS Compliant Hardware*

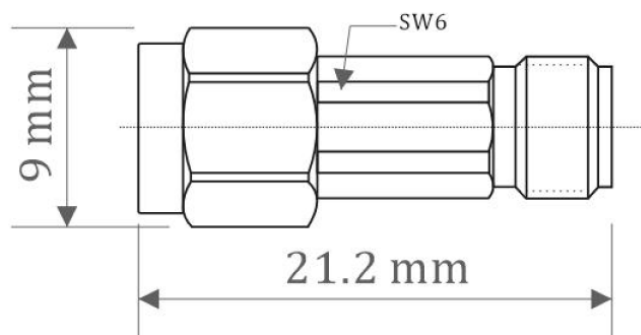

All specifications are subject to change without notice.

Dimensions: inches

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 6/3/17