



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator

Fixed


Model RMA_{Txx.3000.4310mf50}

4.3/10 – 50W

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance (Ω)	VSWR in/out (max)	Input Power (W CW)
DC-3GHz	xx $\pm$ 2.5	50	$\leq 1.25:1$	50

Notes:

- Connector: 4.3/10 male/female
- Operation temperature: -55°C to +85°C
- Materials:
Housing: Aluminum/clear anodized
Fins: Aluminum/black anodized
Connector Body: Brass/ternary alloy plate
Connector Contact: Brass/ternary alloy plate
- Insert attenuation value at “xx” (0-60dB)

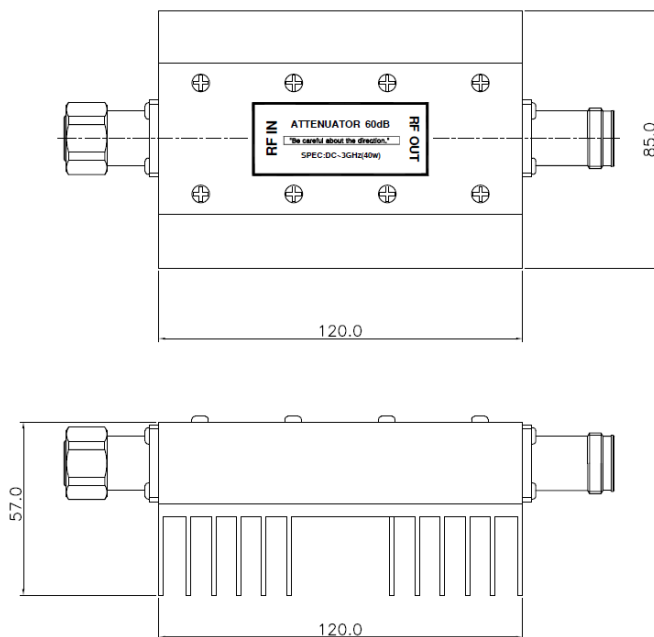

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 1/23/20