



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator



Model RMAT60.3000Nmf100

Fixed Attenuator Type N

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance (ohms)	VSWR (max)	Power
DC-3000MHz	60+/-2.0	50	$\leq 1.3:1$	100W CW

Notes:

- Connector: N male/female
- Operation temperature: -40C to +85C deg
- Materials:
Housing: Aluminum/black anodized
Connector Body: Brass/ternary alloy plate
Connector Contact: Brass/gold

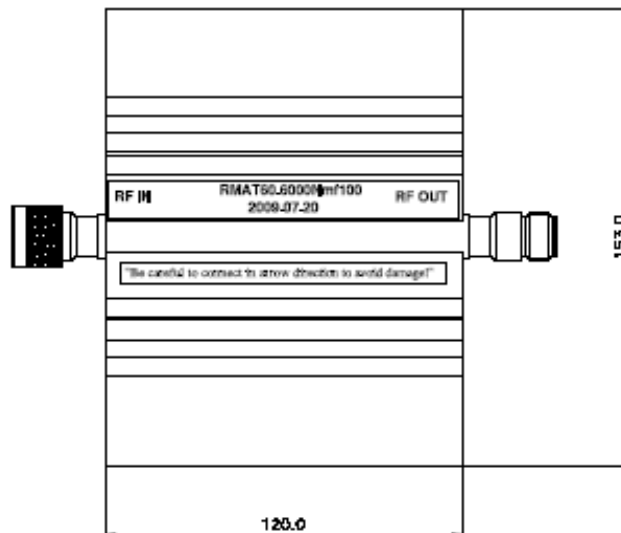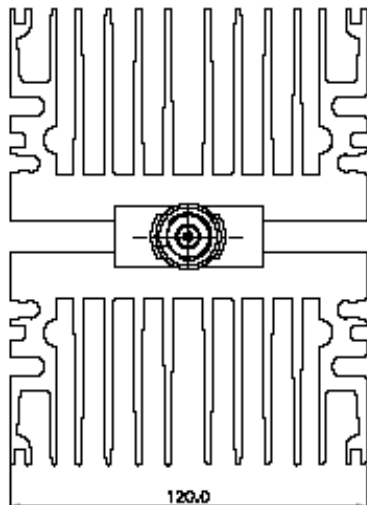

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 8/27/05