94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator

FIXED

Model RMATxx.4000BNCmf BNC series

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Accuracy (dB max)	VSWR (typ)	Power (avg watts)
DC-4	1-20	+/-0.8	1.20:1	2

Notes:

a. xx = attenuation value (to 20dB)
b. Connector: BNC male/female
c. Impedance: 50Ω
d. Operation temperature: -55°C to +85°C
e. Case material: brass/nickel
f. Connector materials: shell = brass/nickel, contacts = BeCu gold, Dielectric=PTFE

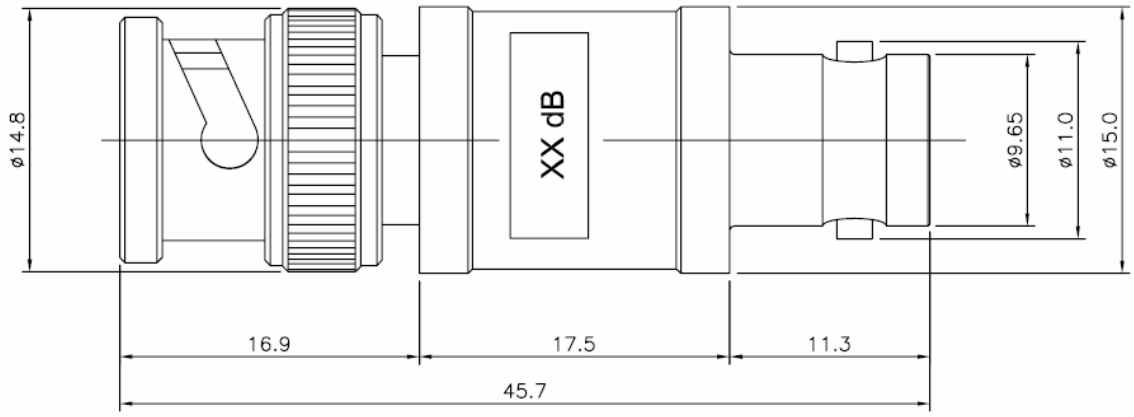

All specifications are subject to change without notice. Dimensions: millimeters

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 7/13/09