



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMA_Txx.110000.10mf

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (max)	Power (avg)
DC-110	3 -1/+2	50Ω	1.60:1	1 watt
	6 -1/+2			
	10 -1/+2			
	20 -2/+1			

Notes:

- Weight: 5grams
- Connector: 1.0mm male/female
- Operation temperature: -55°C to +100°C
- Case material: Stainless Steel/ passivate
- Power rated @ 25°C derated linearly to 0W @ 100°C
- Insert desired attenuation value at "xx" in P/N

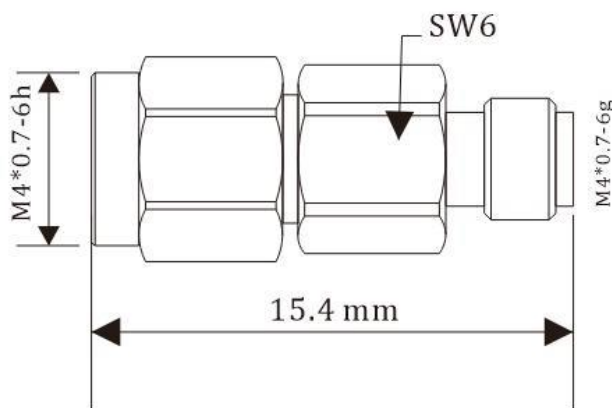

All specifications are subject to change without notice.

Dimensions: millimeters

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 9/2/19