



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMatxx.6000QMaf

Fixed Attenuator QMA

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance (ohms)	VSWR (max)	Power
DC-6000MHz	xx+/-0.5	50	1.20:1	1W CW

Notes:

- Connector: QMA male/female
- Insert attenuation value at "xx"
- Operation temperature: -40C to +85C deg
- Materials:
 - Housing: Brass/nickel
 - Connector Body: Brass/nickel
 - Connector Contact: BeCu/gold

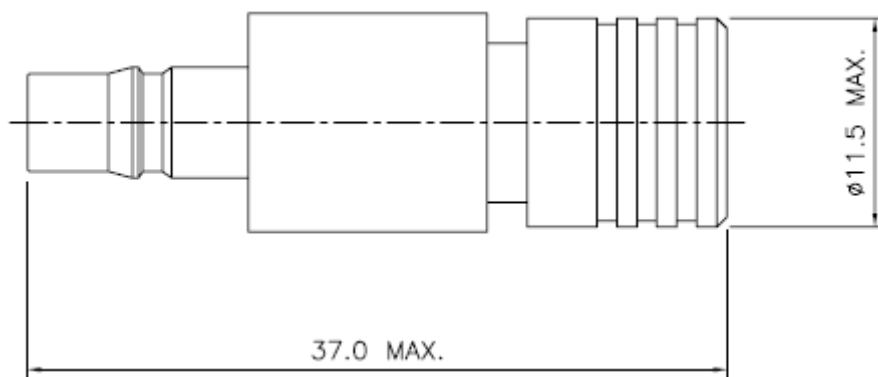

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com