



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMA_{Txx.65000.185mfa}

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (max)	Power (avg)
DC-65	1-3 +/- 1.2	50Ω	1.35:1	2 watts
	6 +/- 1.2			
	10 +/- 1.2			
	20 +/- 1.2			
	30 +/- 1.5			

Notes:

- Weight: 5grams
- Connector: 1.85mm male/female
- Operation temperature: -55°C to +125°C
- Case material: Stainless Steel/ passivate
- Power @25°C derated linearly to 0W @ 125°C
- Insert desired attenuation value at “xx” in P/N

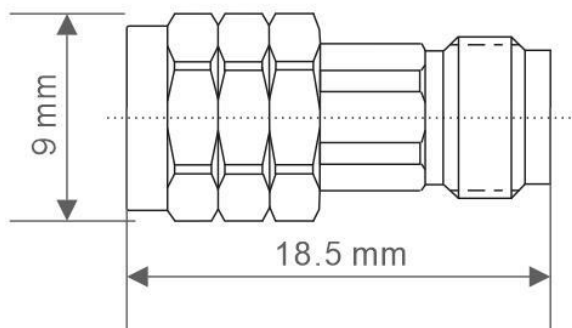

All specifications are subject to change without notice.

Dimensions: millimeters

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 9/2/15