



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial Attenuator


Model RMA_Txx.67000.185mf

Fixed Attenuator

Frequency Range (GHz) FL-Fu	Attenuation (dB max)	Impedance	VSWR (max)	Power (avg)
DC-67	1-3 +/- 0.9 4-8 +/- 1.0 9-25 +/- 0.8 26-40 +/- 1.0	50Ω	1.30:1	2 watts

Notes:

- Weight: 5grams
- Connector: 1.85mm male/female
- Operation temperature: -55°C to +125°C
- Case material: Stainless Steel/ passivate
- Insert desired attenuation value at "xx" in P/N

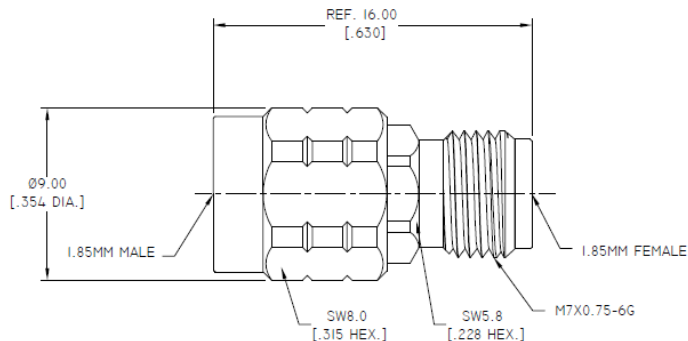

All specifications are subject to change without notice.

Dimensions: inches

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 9/2/19