



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMCI.1000-2000Sf


Circulator SMA female

Frequency	Insertion Loss	Isolation	VSWR
1000-2000MHz	0.7dB max	17dB min	1.4:1 max

Notes:

- Input and output impedance: 50 Ω
- Connector: SMA female 3 places
- Forward Power: 10W max Reverse:1W max
- Case material: Aluminum alloy
- Operation temperature: -35°C to +85°C
- RoHS Compliant

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B & AAS, EPA3060A & EPA7196, EPA3052 & AAS, EN1122: 2001 & AAS, EPA3540C & GC-MS

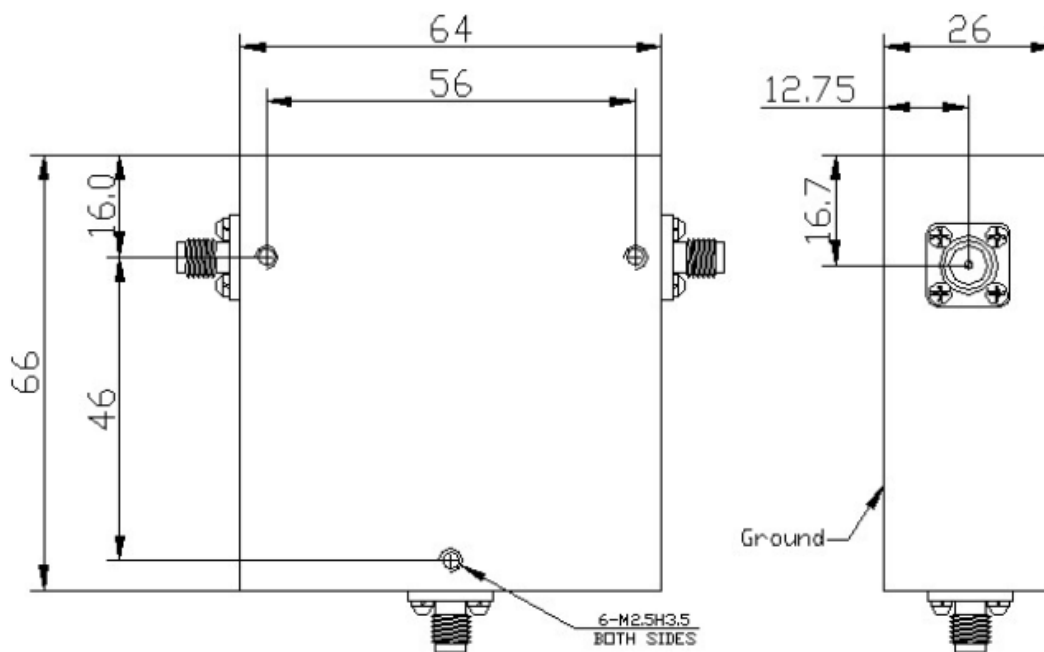

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com