94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Drop-In Series

Model RMCI.10800-11800T Circulator Drop-in

Frequency	Insertion Loss	Isolation	VSWR
10.8-11.8GHz	0.50dB max	20dB min	1.25:1 max

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: Solder tab 3 places**
c. **Forward Power: 5W max**
d. **Case material: steel/nickel plate**
e. **Direction: clockwise**
f. **Operation temperature: -55°C to +85°C**
g. **RoHS Compliant**

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS

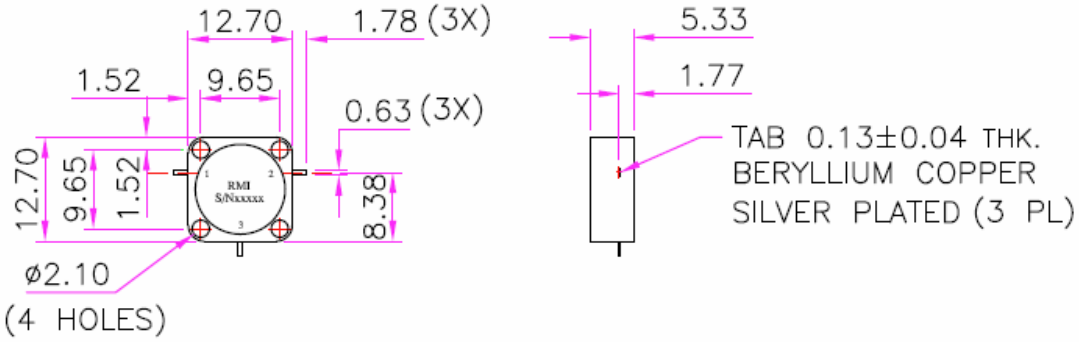

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 4/26/13