



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators


Model RMCI.1325-2710Sfa

Circulator SMA female

Frequency	Insertion Loss	Isolation	Return Loss
1325-2710GHz	0.5dB max	17dB min	15dB min @ 1.32-2.71GHz 17dB min @ 1.35-2.69GHz

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 3 places
- Forward Power: 50W max
- Case material: Aluminum alloy
- Operation temperature: -35C to +85C deg
- RoHS Compliant

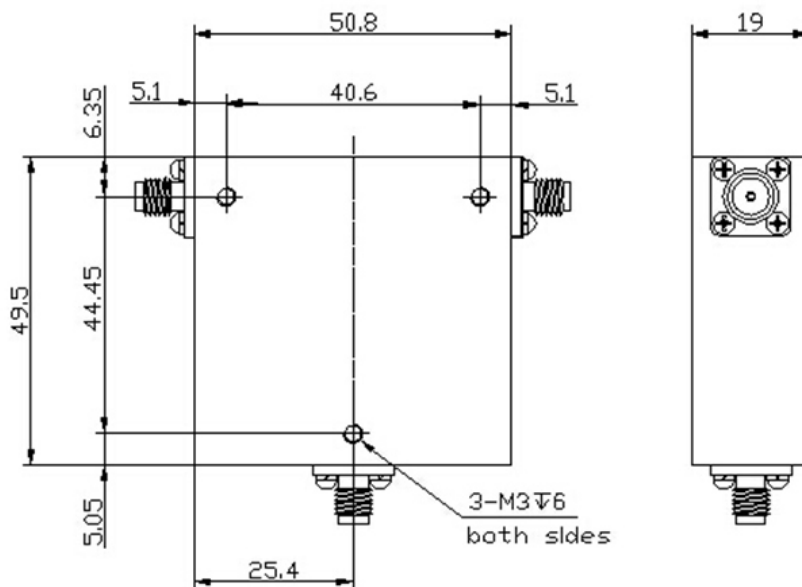

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com