



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMCI.164-174Nf


Circulator N female

Frequency	Insertion Loss	Isolation	VSWR
164-174MHz	0.5dB max	20dB min	1.25:1 max

Notes:

- a. Input and output impedance: 50 Ω
- b. Connector: N female 3 places
- c. Forward Power: 500Wcw, 2KWpeak
- d. Case material: Aluminum alloy w/clear iridite
- e. Operation temperature: -35°C to +85°C
- f. RoHS Compliant

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

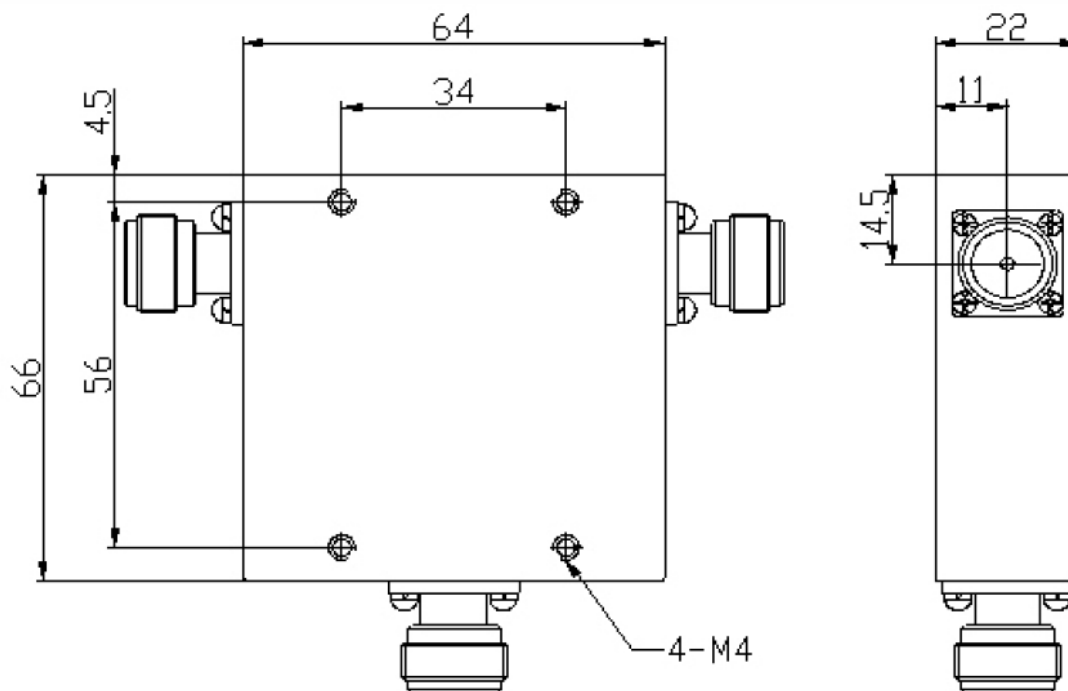

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com