



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators


Model RMCI.1700-2200Sf

Circulator SMA female

Frequency	Insertion Loss	Isolation	VSWR
1700-2200MHz	0.4dB max	20dB min	1.30:1 max

Notes:

- Input and output impedance: 50Ω
- Connector: SMA female 3 places
- Power: Forward - 100W max, Reverse – 50W
- Case material: Aluminum alloy
- Operation temperature: -35°C to +85°C
- RoHS Compliant

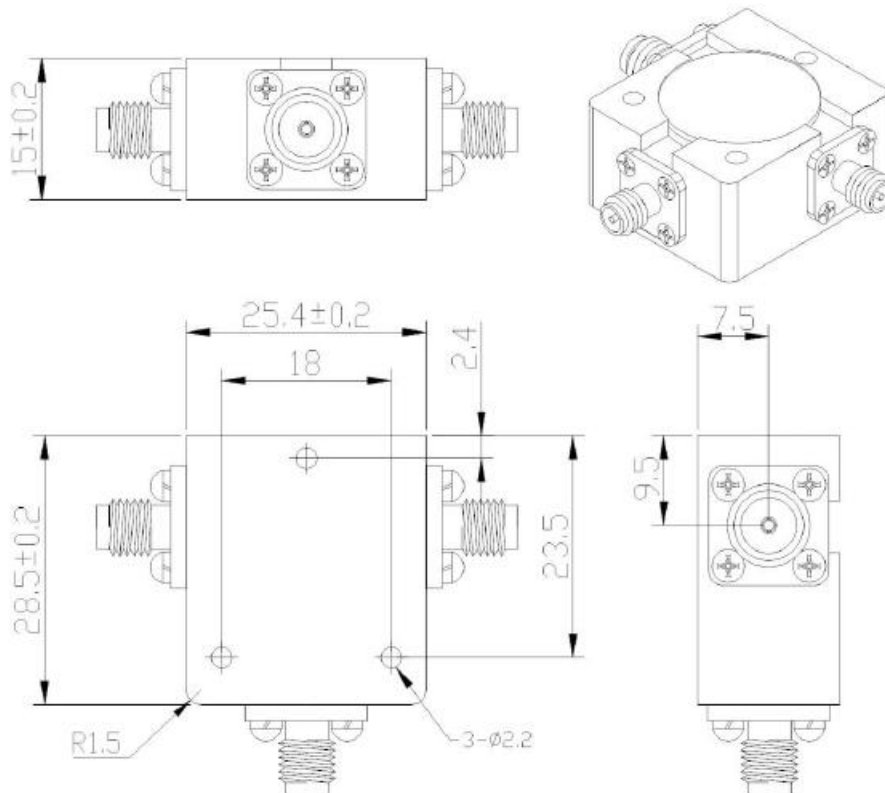

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com