



94 JACKSON ROAD, SUITE 110 DEVENS, M A 01451

Isolators / Circulators


Model RMCI.1700-2300Sf

20dB Circulator SMA female

Frequency	Forward Insertion Loss	Reverse Isolation	Forward Power	VSWR
1700-2300MHz	0.4dB max	20dB min	100W	1.25:1 max

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female
- Case material: Aluminum alloy
- Operation temperature: -40C to +85C deg

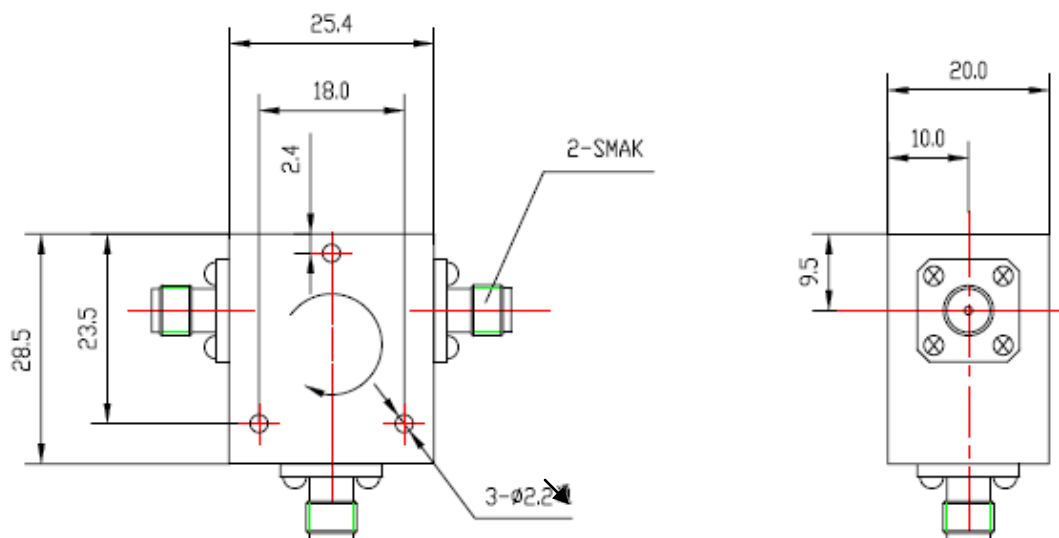

All specifications are subject to change without notice.

Telephone: 978.456.9186 or 978.772.3767

Fax: 978.772.3768

www.responsemicrowave.com