# Circulator

| Model | Freq. Range (Ghz) $F_L$-$F_U$ | Insertion Loss(dB) | Isolation (dB) | VSWR (dB) |
|---|---|---|---|---|
| | | Max | Min | Max |
| RMCI.1710-2155Sf | 1.710-2.155 | 0.5 | 20 | 1.25 |

## Note:

※ Input and output impedance: 50 Ohms
※ Connector: SMA-F/F/F
※ Forward Power: ≤100w
※ Case material:Ferrite.
※ Guarantee: 12months
※ Operation temperature:-30C-+70C deg
※ RoHS compliant

*Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:*
***EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS***

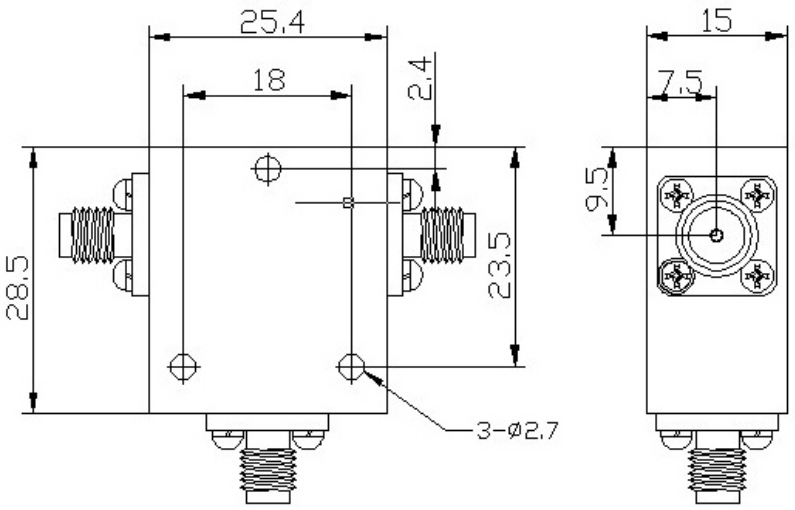


Add: 94 Jackson Rd, Suite 110 , Devens, MA 01434
Phone: (978) 772-3767 or (978) 772-3778, Fax: (978) 772-3768
E-mail: info@responsemicrowave.com