



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMC1.2000-4000Nf


Circulator, N female

Frequency	Insertion Loss	Isolation	VSWR
2000-4000MHz	0.5dB max	18dB min	1.30:1 max

Notes:

- Input and output impedance: 50 Ω
- Connector: SMA female 3 places
- Forward Power: 100W max Reverse:1W max
- Case material: Aluminum alloy
- Operation temperature: -35°C to +85°C
- RoHS Compliant

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

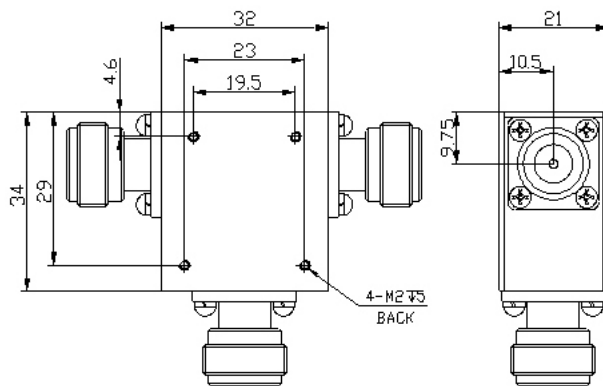

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com