94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMCI.2000-6000Sf Circulator SMA female

Frequency	Insertion Loss	Isolation	VSWR
2000-6000MHz	1.0B max	14dB min	1.50:1 max

Notes:

a. **Input and output impedance: 50 Ohms**
b. **Connector: SMA female 3 places**
c. **Forward Power: 20W max**
d. **Case material: Ferrite/Aluminum alloy**
e. **Operation temperature: -35C to +85C deg**
f. **RoHS Compliant**

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS

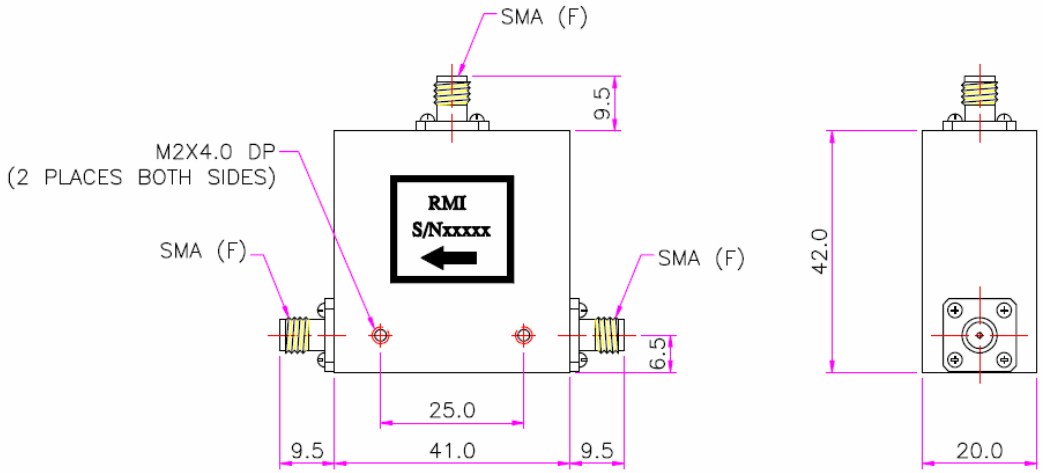

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 4/26/07