



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMCI.2400-2500Nfa


Circulator, N female

Frequency	Insertion Loss	Isolation	VSWR
2400-2500MHz	0.30dB max	23dB min	1.2:1 max

Notes:

- Input and output impedance: 50 Ohms
- Connector: N female 3 places
- Forward Power: 500W max
- Case material: Ferrite/Aluminum alloy
- Direction: clockwise
- Operation temperature: -35C to +85C deg
- RoHS Compliant

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applied: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

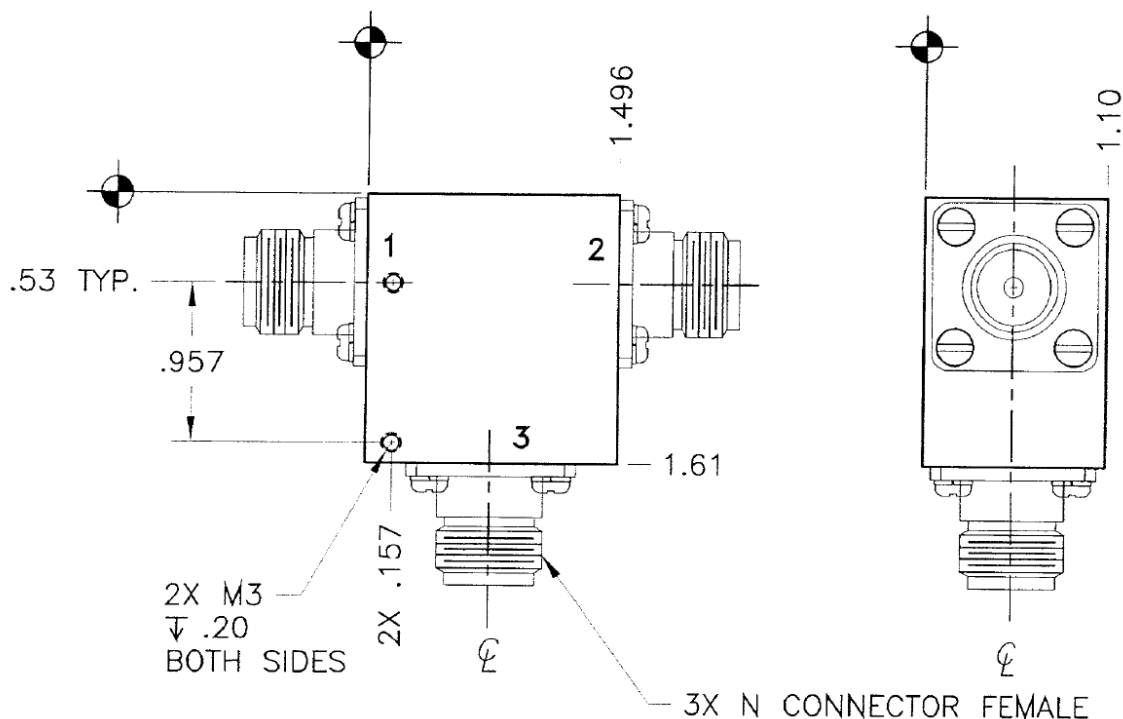

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com