



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMCI.4000-12400Sf


Circulator, SMA female

Frequency	Insertion Loss	Isolation	VSWR
2400-2500MHz	1.0dB max	14dB min	1.5:1 max

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 3 places
- Forward Power: 500W max
- Case material: Ferrite/Aluminum alloy w/black paint
- Direction: clockwise
- Operation temperature: -35C to +85C deg
- RoHS Compliant

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

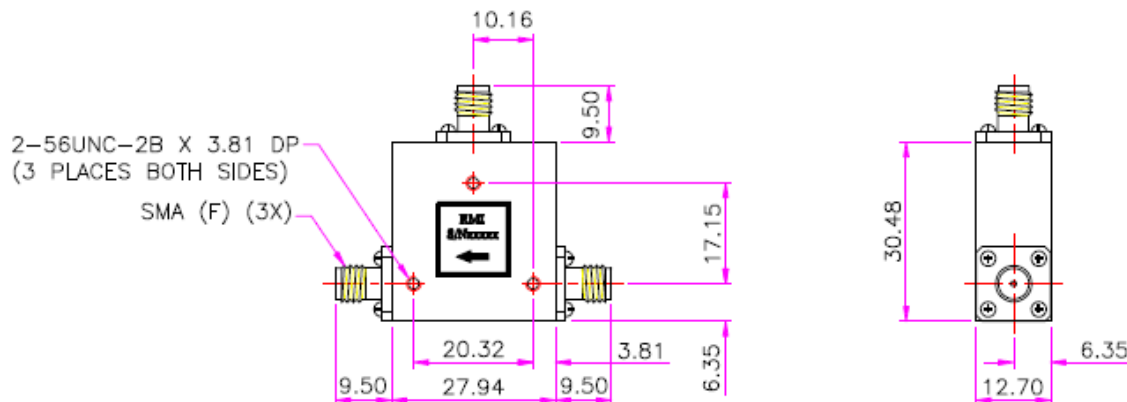

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com