94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMCI.5000-6000Sf Circulator, SMA female

Frequency	Insertion Loss	Isolation	VSWR
5 - 6 GHz	0.5dB max	20dB min	1.25:1 max

Notes:

a. Input and output impedance: 50Ω
b. Connector: SMA female 3 places
c. Forward Power: 100W max
d. Case material: Aluminum alloy/clear iridite
e. Operation temperature: -54°C to +85°C
f. RoHS Compliant
g. Direction: clockwise

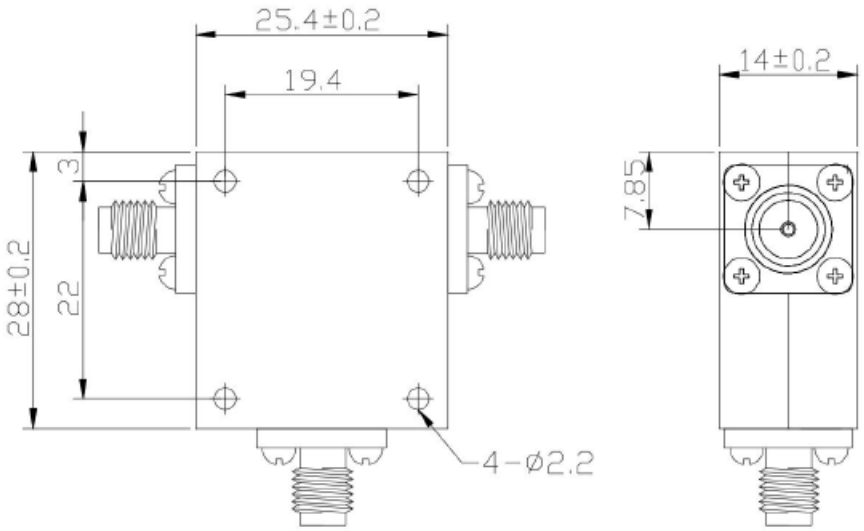

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 5/31/17