94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMCI.600-800Sf Circulator SMA female

Frequency	Insertion Loss	Isolation	VSWR
600-800MHz	0.5dB max	20dB min	1.3:1 max

Notes:

a. Input and output impedance: 50 Ohms
b. Connector: SMA female 3 places
c. Power: forward 100w, reverse 10W
d. Case material: Aluminum alloy with Nickel-plating
e. Operation temperature: -20C to +85C deg
f. Mounting holes: 4 x 3.0mmOD thru

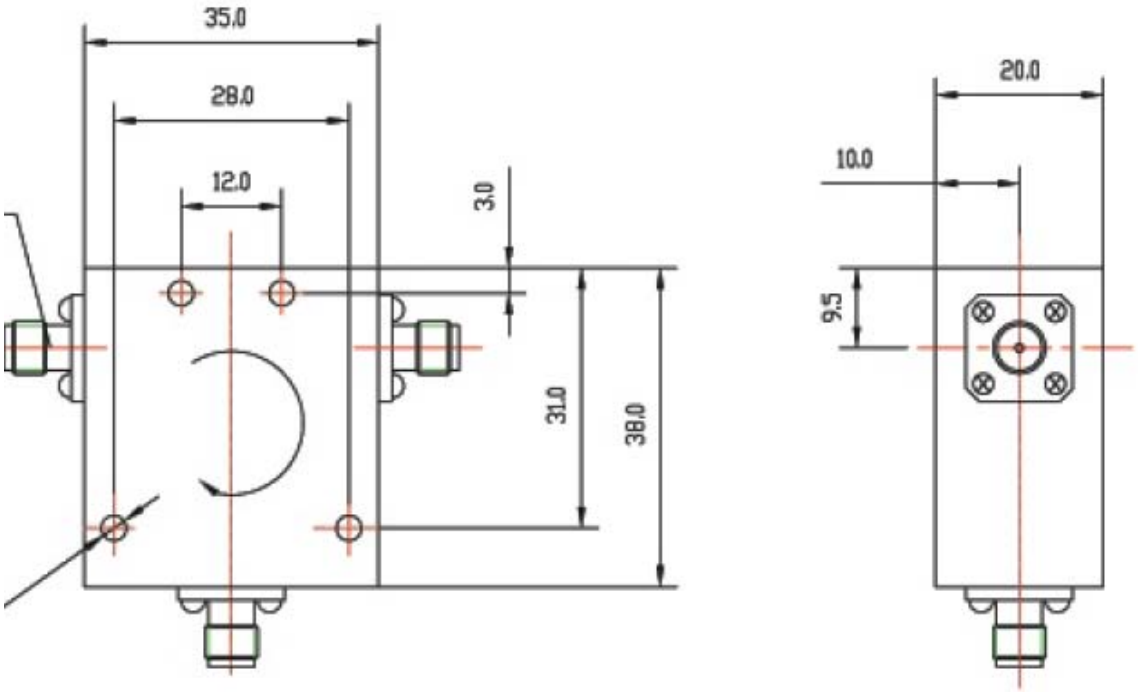

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 7/25/05