



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Connectorized Series

Model RMCI.8000-12000Sf


Circulator, SMA

Frequency	Insertion Loss	Isolation	VSWR
8-12GHz	0.5dB max	18dB min	1.3:1 max

Notes:

- Input and output impedance: 50Ω
- Connector: SMA female 3 places
- Forward Power: 50W max
- Case material: steel/nickel plate
- Direction: clockwise
- Operation temperature: -55°C to +85°C
- RoHS Compliant

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

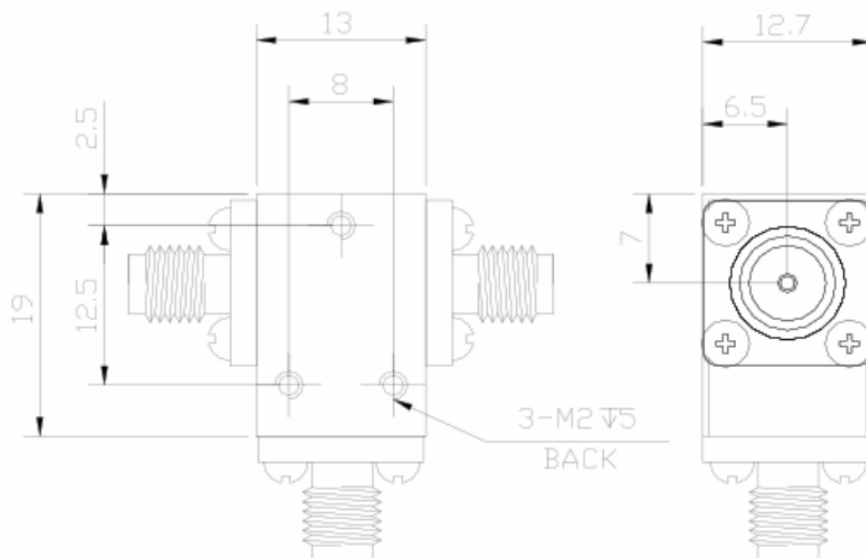

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com