



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators


Model RMCI.895-935Nfwb

Circulator N female

Frequency	Insertion Loss	Isolation	VSWR
895-935MHz	0.25dB max	30dB min*	1.20:1 max

Notes:

- Input and output impedance: 50 Ω
- Connector: N female 3 places
- Forward Power: 100W max , Reverse: 10W max
- *Isolation optimized for unit Antenna Port (unit Port 2)
- Case material: Aluminum alloy with internal seals & black epoxy finish
- Operation temperature: -35°C to +85°C
- RoHS Compliant
- Port ID: 1 2
3

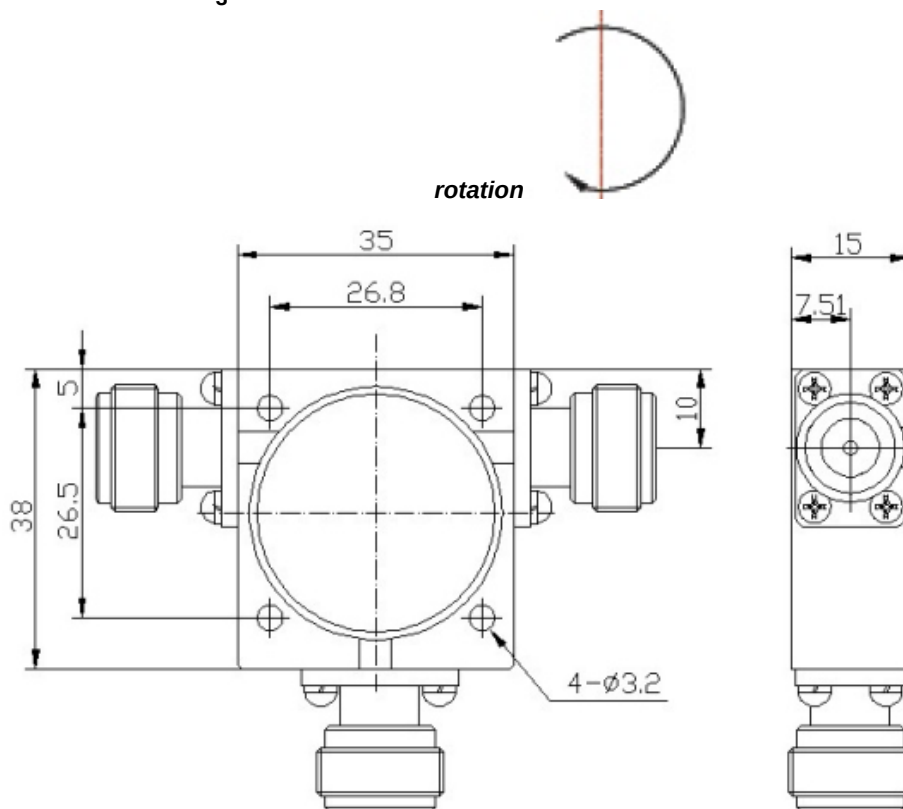

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com