



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMIS.1000-2000Sf


Isolator, SMA female

Frequency	Insertion Loss	Isolation	VSWR
1 - 2 GHz	0.6dB max	17dB min	1.40:1 max

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female
- Input Power: 50W, Reverse Power: 10W, Peak Power: 50W
- Case material: Aluminum alloy
- Operation temperature: -30°C to +80°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

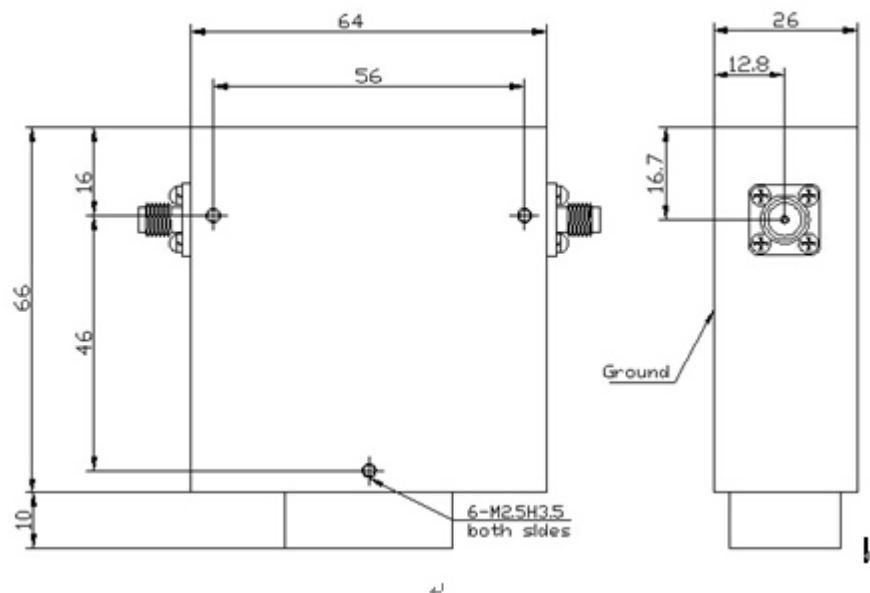

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com