



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators


Model RMIS.10700-11700Sf

Isolator, SMA female

Frequency	Insertion Loss	Isolation	VSWR
10.7-11.7 GHz	0.4dB max	20dB min	1.25:1 max

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 2 places
- Power: forward 30w, reverse 5W
- Case material: Aluminum alloy
- Operation temperature: -35C to +75C deg

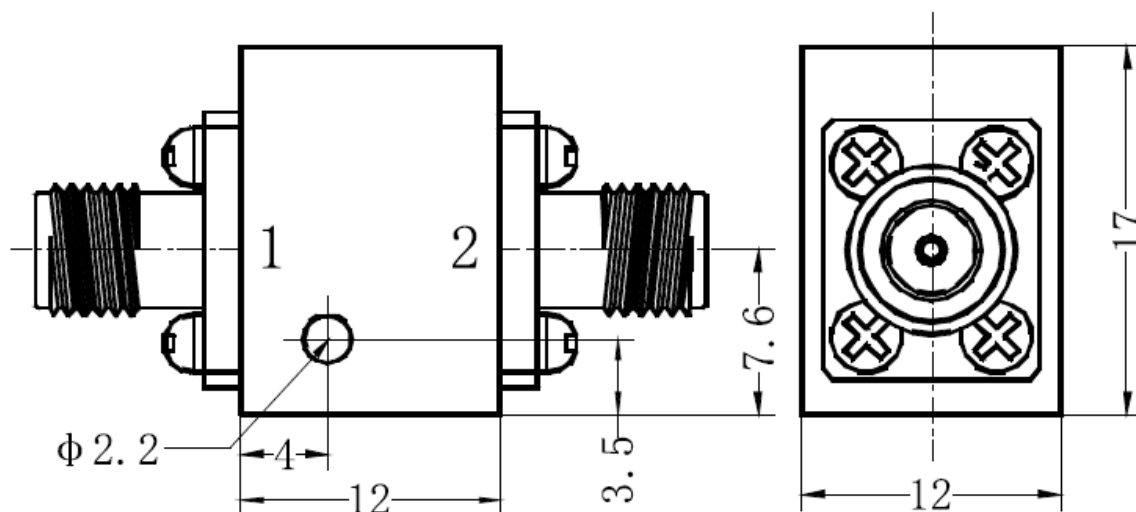

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com