



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

## Isolators / Circulators


Model RMIS.10700-12700Sf

Isolator, SMA female

| Frequency     | Insertion Loss | Isolation | VSWR       |
|---------------|----------------|-----------|------------|
| 10.7-12.7 GHz | 0.4dB max      | 20dB min  | 1.25:1 max |

### Notes:

- Input and output impedance:  $50\Omega$
- Connector: SMA female 2 places
- Power: forward 30w, reverse 5W
- Case material: Aluminum alloy
- Operation temperature:  $-35^{\circ}\text{C}$  to  $+75^{\circ}\text{C}$

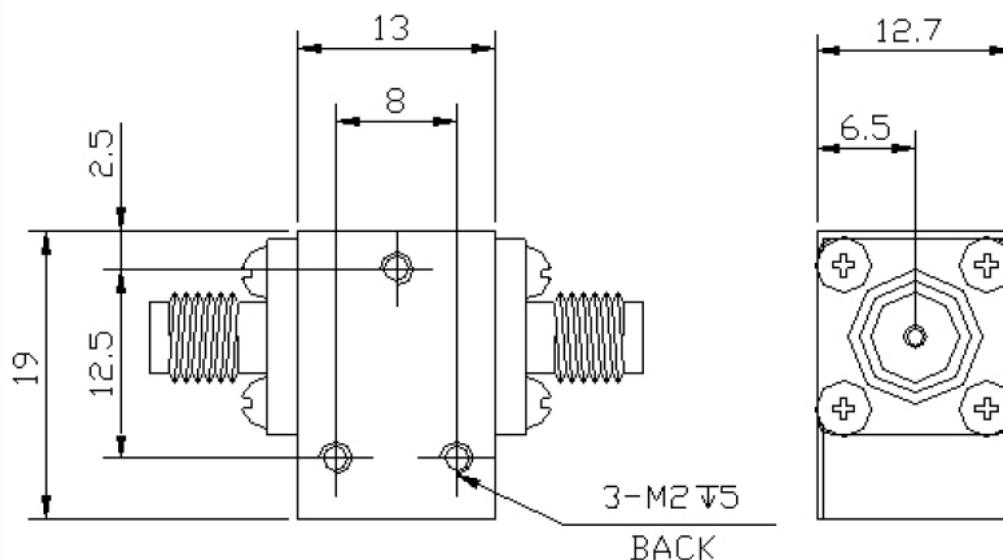

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)