



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

## Isolators / Circulators


**Model RMIS.1600-3200Sf**

**Isolator, SMA female**

| Frequency    | Insertion Loss | Isolation | VSWR       |
|--------------|----------------|-----------|------------|
| 1.6 – 3.2GHz | 0.6dB max      | 18dB min  | 1.35:1 max |

**Notes:**

- Input and output impedance:  $50\Omega$
- Connector: SMA female
- Power: forward 10W max, reverse 10W max
- Case material: Aluminum alloy black paint
- Operation temperature:  $-30^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$

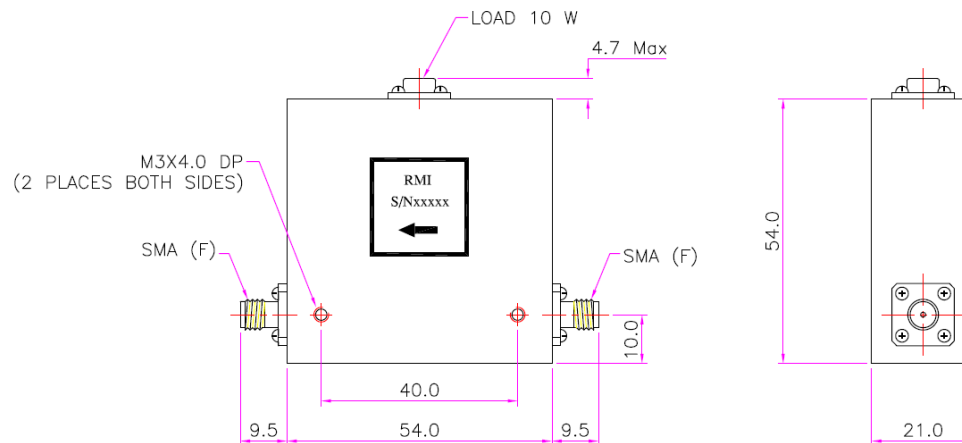

*Dimensions in mm. All specifications are subject to change without notice.*

**Telephone: 978-772-3767**

**Fax: 978-772-3768**

[www.responsemicrowave.com](http://www.responsemicrowave.com)